


MAIN CHARACTERISTICS

- HEIGHT UNDER JIB 20 m
- MAX. LOAD 2.000 Kg
- LOAD AT JIB END 650 Kg
- HOOK REACH WITH MAX LOAD 11,5 m
- HOOK REACH WITH LOAD AT JIB END 26,6 m
- 3 SLEWING SPEEDS 6-20-40 m/min
- 2 TROLLEYING SPEEDS 3-30 m/min
- 3 SLEWING SPEEDS 0.2-0.5-1 rpm
- POWER HOISTING 10 CV
- POWER SLEWING 2 CV
- POWER TROLLEYING 2.5 CV
- CRANE WEIGHT 7.000 Kg
- CONCRETE COUNTERWEIGHTS 12.500 Kg
- MAX. REACTION 10.000 Kg

TRANSPORT

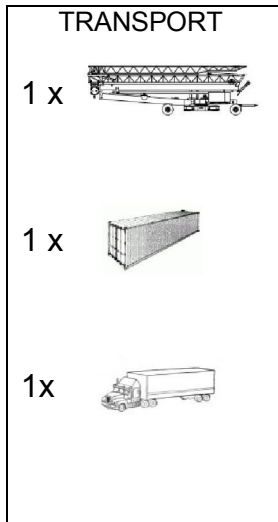

REACH:

	Height under hook	Hook reach	Max. load (Kg)	Load jib end (Kg.)
JIB 0°	19,4 m	26,6 m	2000	650
JIB 15°	25,4 m	25,7 m	650	650
JIB 30°	31 m	22,5 m	650	650

LOAD DIAGRAM

HOOK REACH	11,5	14	16	18	20	22	24,7	26,6
MAX. LOAD	2000	1600	1350	1150	990	850	725	650