

POWER MOTOR

- 3 HOISTING SPEEDS 6-12-23 m/min
- 1 TROLLEYING SPEED 20 m/min
- 2 SLEWING SPEEDS 0,3-1 rpm

- HOISTING POWER 3 CV
- SLEWING POWER 1,5 CV
- TROLLEYING POWER 2 CV
- HYDRAULIC POWER 2CV





CHARACTERISTICS

HEIGHT UNDER JIB	16 m
HEIGHT UNDER HOOK	15 m
HOOK REACH	20 m
MAX. LOAD	1200 Kg
LOAD AT JIB END	500 Kg
HOOK REACH WITH MAX. LOAD	9 m
CRANE WEIGHT	4.700 Kg
ASSEMBLY COUNTERWEIGHTS	2.000 Kg
TOTAL COUNTERWEIGHTS	7.000 Kg
MÁX. REACTION	9.050 daN
LOAD MOMENT	98,1 kNm

REACH


	Height under hook (m)	Hook reach (m)
Jib 0°	16	20
Jib 30°	24.5	17,3

TRANSPORT

2 x	 WITHOUT COUNTERWEIGHTS	1 x	
2 x	 WITHOUT COUNTERWEIGHTS	1 x	

LOAD DIAGRAMS

HORIZONTAL JIB

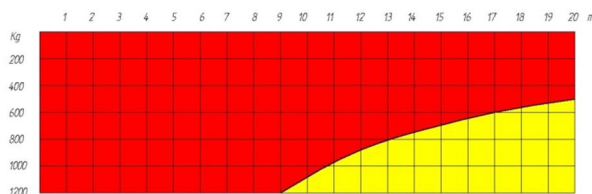

INCLINATION JIB 30°

